


WOOD WHALER SEAWALL

FRONT ELEVATION VIEW

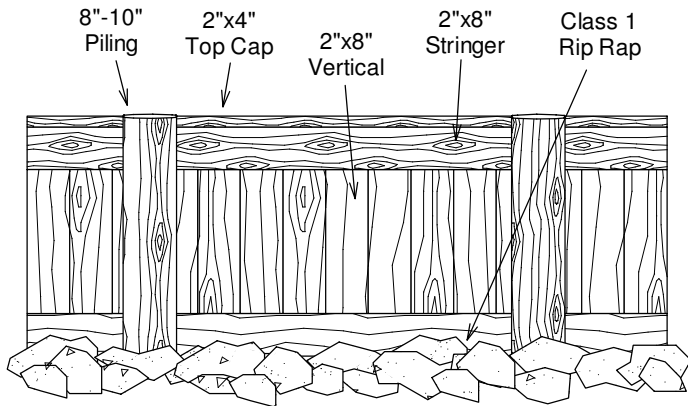

SEAWALL SPECIFICATIONS

Includes a 2' solid concrete footing, 8"-10" round poles placed every 5'-6" with .80 CCA treatment, 2"x8"s (all lumber has ground contact treatment) running vertical with (2) 2"x8" whalers running horizontal and a 2"x4" top cap. All poles and ends of 2"x8"s are set in concrete footing. Tie-backs will be needed if wall exceeds 5' in height. Filter cloth will be installed on landward side of wall to prevent erosion thru the wall.

SIDE ELEVATION VIEW

